

STANDARD DEPARTURE CHART
INSTRUMENT – ICAO


TRANSITION ALTITUDE
10000

APP 119.525

AZBUX 2C
VAGEN 8C
BAJUN 2C

RAVAK 8G
RAVAK 8F

NIŠ/
Konstantin Veliki
RWY 11

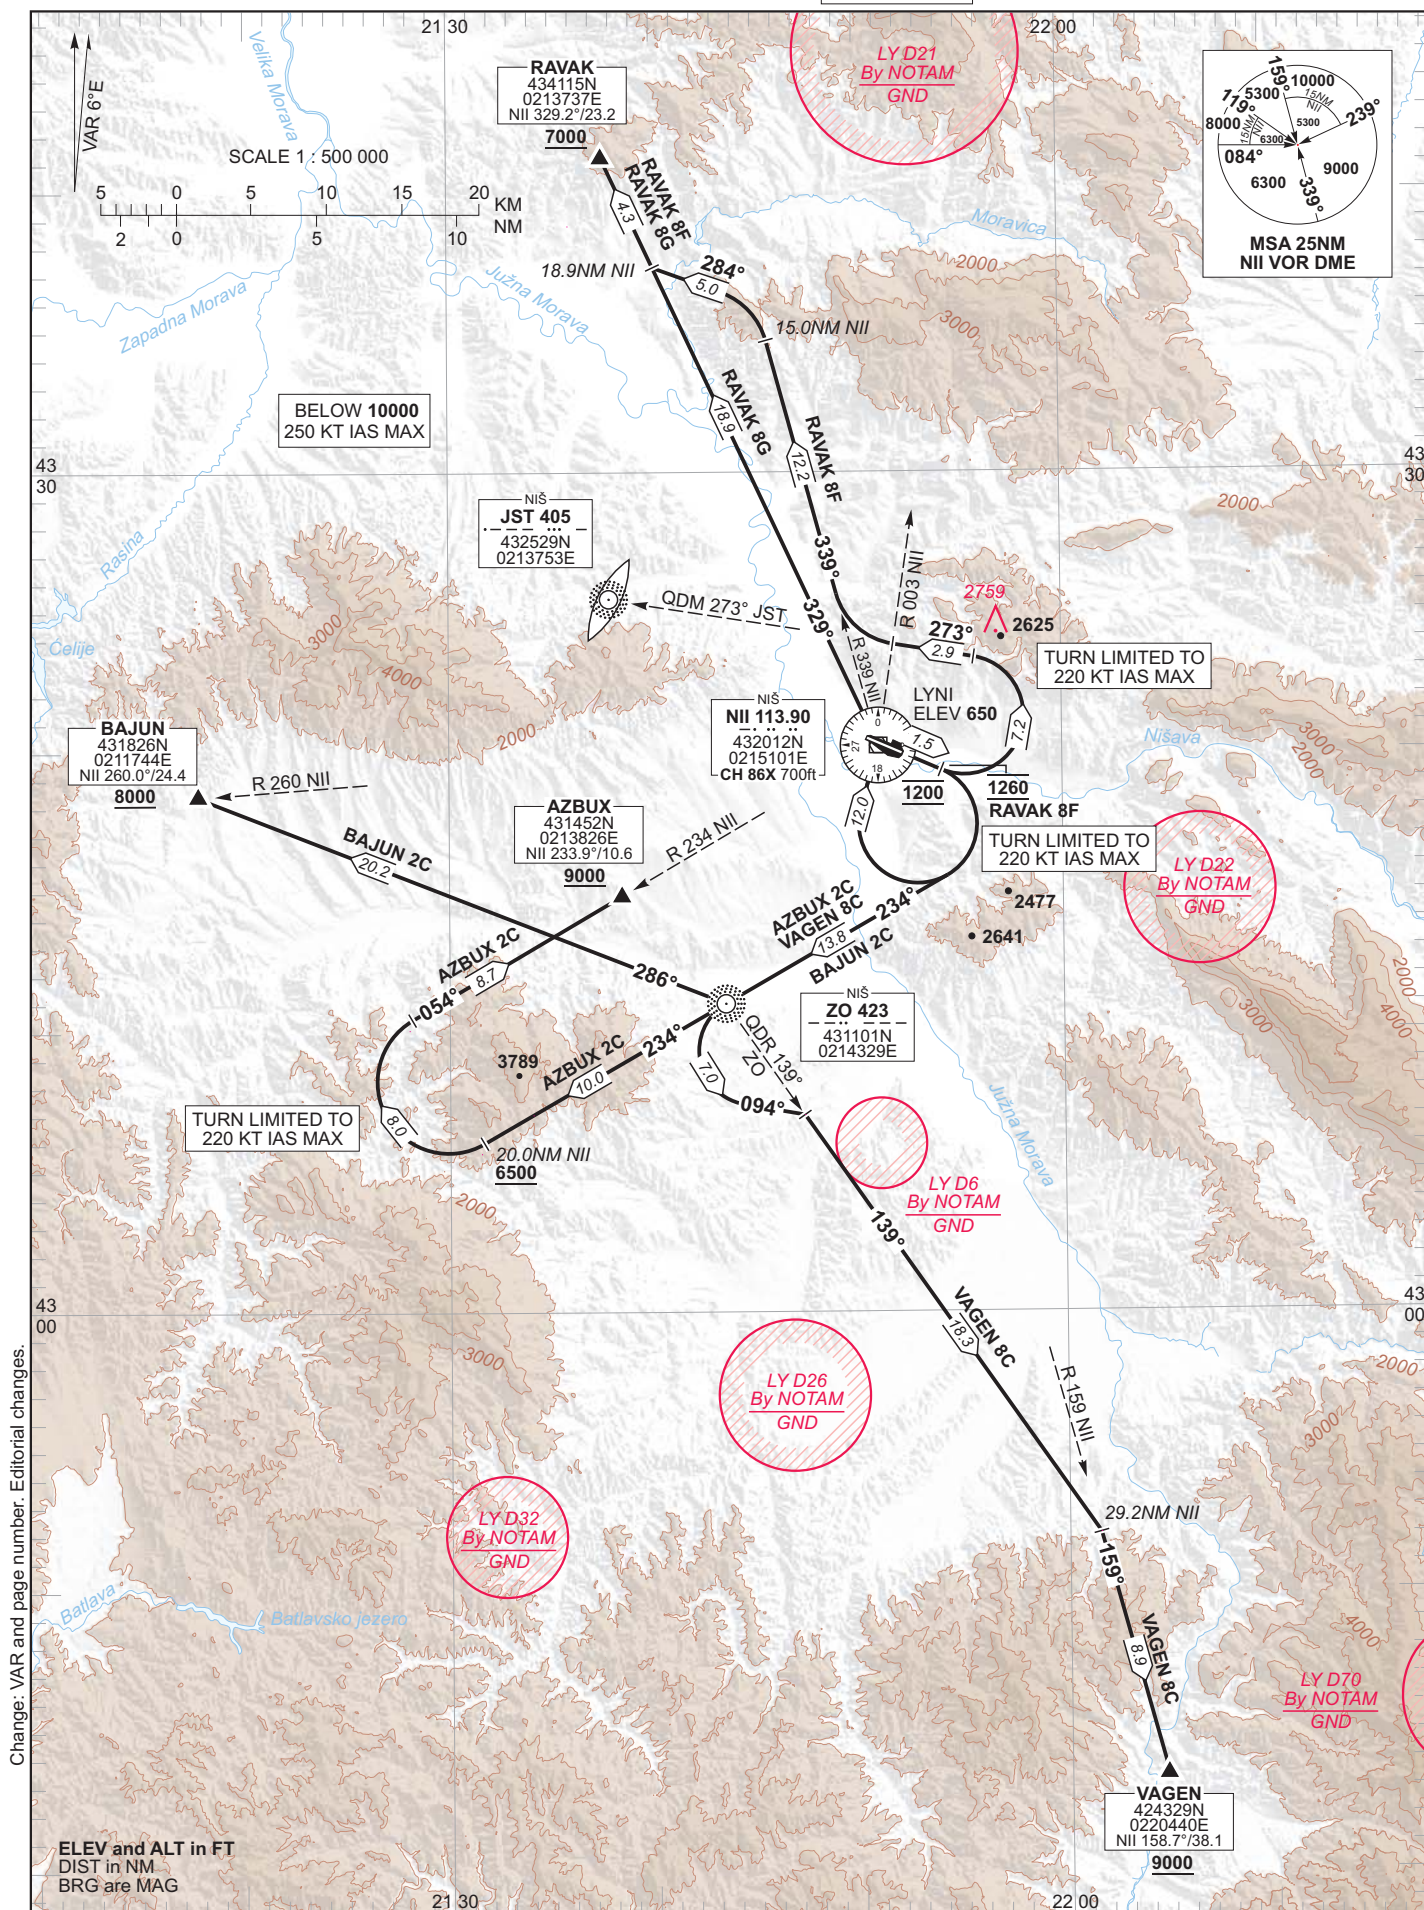

Change: VAR and page number. Editorial changes.

RWY 11 DEPARTURES

<i>SID designator</i>	<i>Lateral</i>	<i>Vertical</i>
VAGEN 8C (VAGEN EIGHT CHARLIE)	Climb straight ahead. At 1200 FT turn RIGHT (220 KT IAS MAX) climbing inbound ZO NDB. At ZO NDB turn LEFT onto course 094° then turn RIGHT onto ZO QDR 139°. At 29.2NM NII turn RIGHT intercept and follow NII R 159 climbing to VAGEN.	This SID requires PDG of 5.8% (352 FT/NM) until 3200 FT. Cross VAGEN at 9000 FT or above.
AZBUX 2C (AZBUX TWO CHARLIE)	Climb straight ahead. At 1200 FT turn RIGHT (220 KT IAS MAX) climbing inbound ZO NDB. Cross ZO NDB intercept and follow ZO QDR 234°. At 20.0NM NII turn RIGHT (220 KT IAS MAX) intercept and follow NII R 234 climbing to AZBUX.	This SID requires PDG of 5.8% (352 FT/NM) until 3200 FT. Cross 20.0NM NII at 6500 FT or above. Cross AZBUX at 9000 FT or above.
BAJUN 2C (BAJUN TWO CHARLIE)	Climb straight ahead. At 1200 FT turn RIGHT (220 KT IAS MAX) climbing inbound ZO NDB. At ZO NDB turn RIGHT intercept and follow ZO QDR 286° climbing to BAJUN.	This SID requires PDG of 5.8% (352 FT/NM) until 3200 FT. Cross BAJUN at 8000 FT or above.
RAVAK 8G (RAVAK EIGHT GOLF)	Climb straight ahead. At 1200 FT turn RIGHT (220 KT IAS MAX) climbing inbound NII VOR DME. Cross NII VOR DME turn LEFT intercept and follow NII R 329 climbing to RAVAK.	This SID requires PDG of 5.8% (352 FT/NM) until 3200 FT. Cross RAVAK at 7000 FT or above.
RAVAK 8F (RAVAK EIGHT FOXTROT)	Climb straight ahead. At 1260 FT turn LEFT (220 KT IAS MAX) onto JST QDM 273°. At NII R 003 turn RIGHT intercept and follow NII R 339. At 15.0NM NII turn LEFT onto course 284°, at 18.9NM NII intercept and follow NII R 329 climbing to RAVAK.	This SID requires PDG of 6.4% (389 FT/NM) until 3100 FT. Cross RAVAK at 7000 FT or above.

NOTE: Turn is not permitted before DER.